


Q2.6IS Series

Indoor LED Screen- Cabinet Installation




- ✓ Ultra-Light
- ✓ Energy Saving
- ✓ Long Life
- ✓ Easy Customize
- ✓ High Contrast
- ✓ Wide View

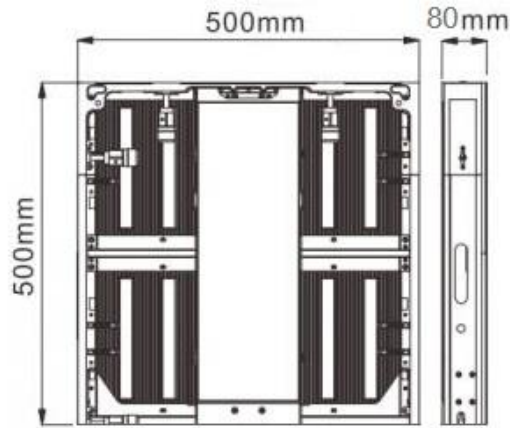

Parameter	Categories	Value
Physical Parameter (cabinet & module)	Pixel Configuration	3 IN 1 SMD
	Pixel Pitch (mm)	2.6
	Cabinet Dimensions (LxWxH)/ (mm)	500*500*80
	Pixel dot per cabinet	192*192
	Pixel density (pixels/sqm.)	147,456
	Module Dimensions (LxWxH)/ (mm)	250*250*14.5
	Pixel dot per module	96*96
Electronic Parameter	Cabinet weight (kg/panel)	10 kg
	Color Grayscale (Bit)	14 bit
	Refresh Rate (Hz)	3840
	Driving Type	Constant Current Driving IC
	Driving Mode (scan)	1/22
Optical Parameter	Brightness (nit)	00
	Optimum Viewing distance (m)	≥2.6
	Optimal Horizontal Viewing Angle (°)	140
	Optimal Vertical Viewing Angle (°)	130
Electrical Parameter	AC Input Voltage (V)	AC200-240
	AC Input Frequency (Hz)	50-60
	Attenuation	≥15%
	Screen Power Consumption (W/m ²)	576

Circumstance Parameter	Storage Temperature (°C)	-20 +50
	Working Temperature (°C)	-20 +50
	IP rating (Front/Rear)	IP30/IP43
	Storage Humidity (RH)	10%~90% non-condensing
	Working Humidity (RH)	10%~60% non-condensing
	Lifetime Typical Value (hrs)	100000
Installation Type	LED Screen Installation Type	Cabinet Installation

Project Related

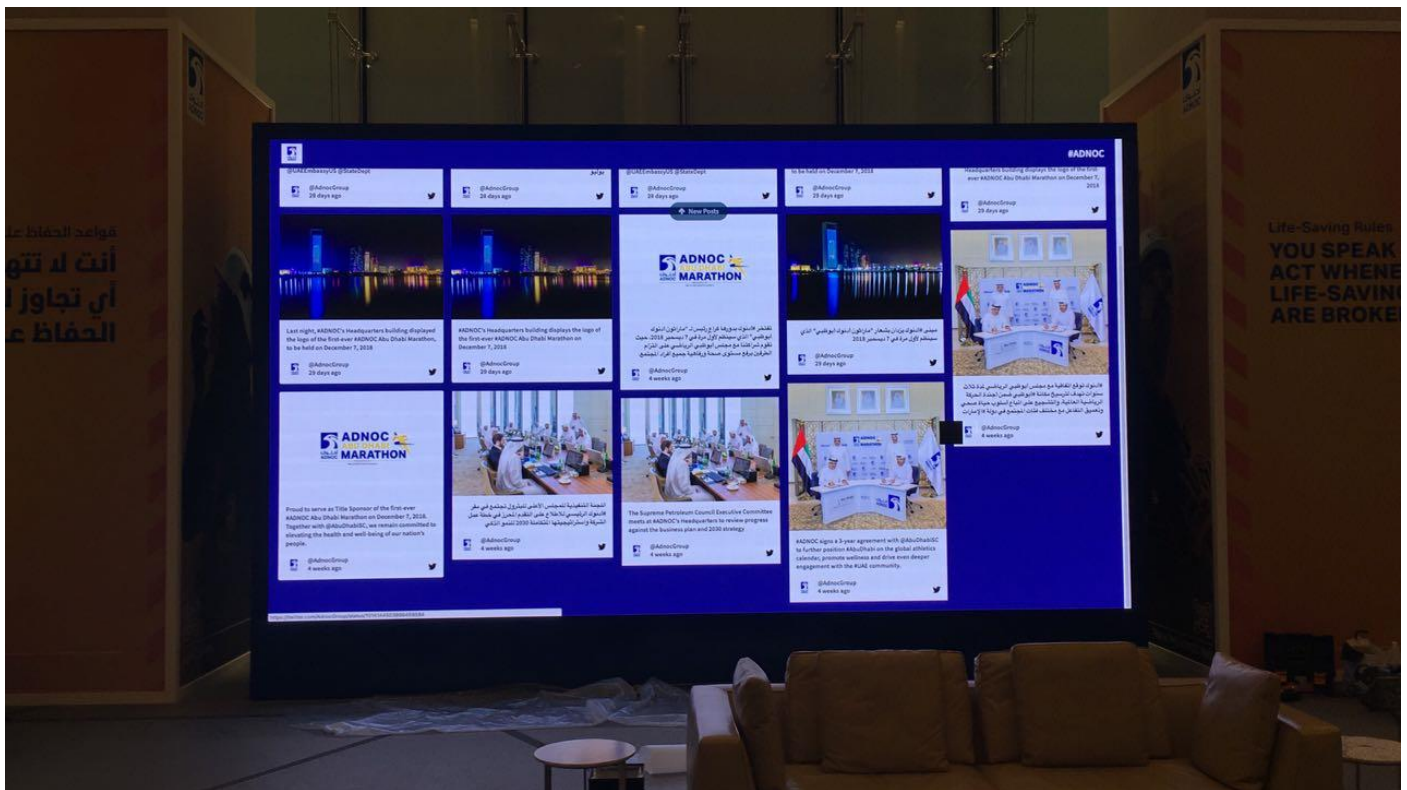

ADNOC, Abu Dhabi